


SOUSTRUHY

KARUSELY



DVOU-STOJANOVÝ VERTIKÁLNÍ SOUSTRUH		SKD - D	SKD - E
Průměr upínací desky	(mm)	4000 / 5000	5000 ÷ 8000
Max. průměr soustružení	(mm)	6000	6500÷10000
Max. výška obrobku	(mm)	2000 / 2800	4000 ÷ 6000
Max. hmotnost obrobku	(kg)	100000	80000 ÷ 320000
Otáčky upínací desky	(min ⁻¹)	125 ÷ 60	100 ÷ 25
Průřez smykadla	(mm)	340 × 340	340 × 340 / 400 × 400
Rezná síla	(kN)	40	100

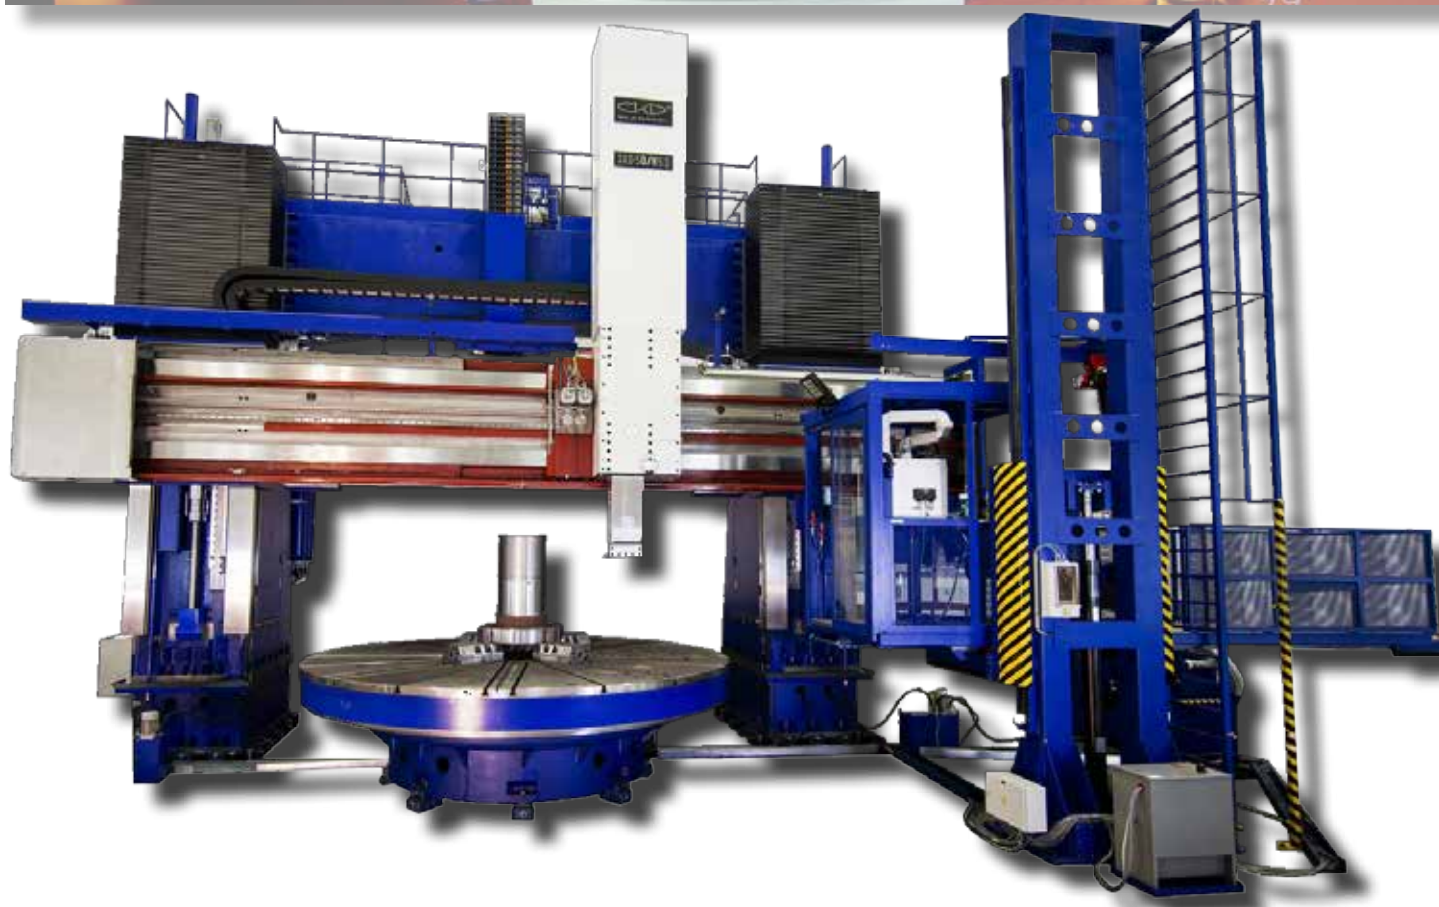